

File No.	File version	confidential


## F1003 GSM MODEM TECHNICAL SPECIFICATION

### General

F1003 GSM MODEM is a kind of cellular terminal device that provides SMS and CSD function by public GSM network.

It adopts high-powered industrial cellular module and supports RS232 port that can conveniently connect one device to a cellular network, allowing you to connect to your existing serial device.

It has been widely used on M2M fields, such as intelligent transportation, smart grid, industrial automation, telemetry, finance, POS, water supply, environment protection, post, weather, and so on.

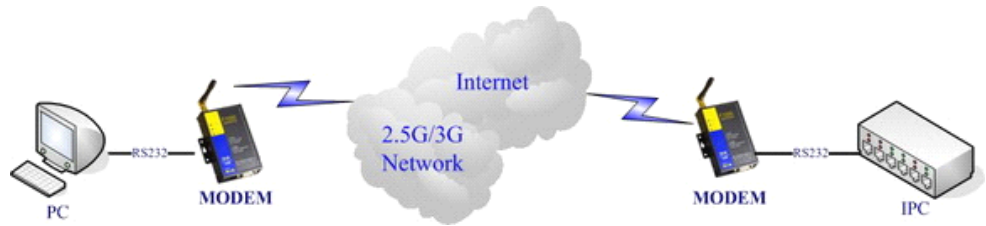

### Product Feature

#### Design for Industrial Application

- ◆ High-powered industrial cellular module
- ◆ Housing: iron, providing IP30 protection.
- ◆ Power range: DC 5~35V

#### Stability and Reliability

- ◆ RS232 port: 15KV ESD protection
- ◆ SIM/UIM port: 15KV ESD protection
- ◆ Power port: reverse-voltage and overvoltage protection
- ◆ Antenna port: lightning protection(optional)

#### Standard and Convenience

- ◆ Support standard RS232 port that can connect to a serial device directly
- ◆ Provide SMS tool software
- ◆ Support standard AT command

#### High-performance

- ◆ Support SMS and CSD function


**Product Specification**

**Cellular Specification**

Item	Content
Cellular Module	Industrial cellular module
Standard and Band	EGSM900/GSM1800MHz, GSM850/900/1800/1900MHz(optional) Compliant to GSM phase 2/2+
Bandwidth	14.4Kbps CSD
TX power	GSM850/900: <33dBm,GSM1800/1900: <30dBm
RX sensitivity	<-107dBm

**Interface type**

Item	Content
Serial	1 RS232 port, 15KV ESD protection Data bits: 5, 6, 7, 8 Stop bits: 1, 1.5, 2 Parity: none, even, odd, space, mark Baud rate: 110~230400 bps
Indicator	"Power", "ACT", "Online"
Antenna	Standard SMA female interface, 50 ohm, lightning protection(optional)
SIM/UIM	Standard 3V/1.8V user card interface, 15KV ESD protection
Power	Standard 3-PIN power jack, reverse-voltage and over voltage protection

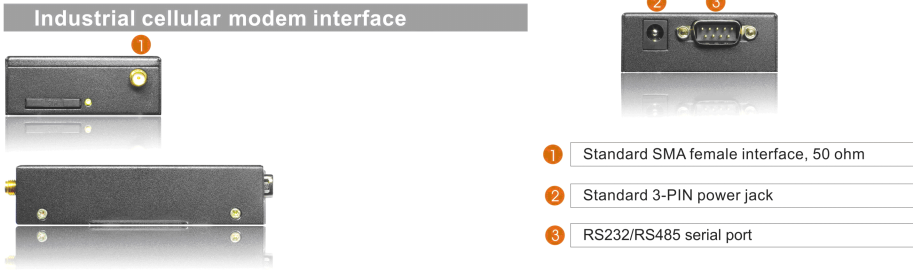

**Industrial cellular modem interface**

- ① Standard SMA female interface, 50 ohm
- ② Standard 3-PIN power jack
- ③ RS232/RS485 serial port

**Power supply**

Item	Content
Standard Power	DC 12V/0.5A
Power range	DC 5~35V
Consumption	<200mA (12V)

**Physical Characteristics**

Item	Content
Housing	Iron, providing IP30 protection
Dimensions	91x58.5x22 mm
Weight	205g

### Environmental Limits

Item	Content
Operating Temperature	-25~+65°C (-13~+149°F)
Extended Operating Temperature	-30~+75°C (-22~+167°F)
Storage Temperature	-40~+85°C (-40~+185°F)
Operating Humidity	95% (unfreezing)